

11/09/00

JC813 U.S. PTO

11-13-00

EK706007995US

A

Please type a plus sign (+) inside this box → ⊕

PTO/SB/05 (11-00)

Approved for use through 10/31/2002. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	096990-026-157
First Inventor	Wei, Guang-Xue et al.
Title	Fluorescent Polymeric Articles Fabricated From U.V. Light Absorbing Polymers
Express Mail Label No.	EK706007995US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages 41]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 2]
5. Oath or Declaration [Total Pages]
 - a. ☒ Newly executed (original or copy)
Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 18 completed)
 - b. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
6. ☐ Application Data Sheet. See 37 CFR 1.76

ADDRESS TO:Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.
17. ☐ Other:

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

Prior application information:

Examiner: _____

Group Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Sandra B. Weiss				
Address	Jones, Day, Reavis & Pogue 77 West Wacker				
City	Chicago	State	Illinois	Zip Code	60601-1692
Country	USA	Telephone	312/782-3939	Fax	312/782-8585
Name (Print/Type)	Sandra B. Weiss		Registration No. (Attorney/Agent)	30,814	
Signature	<i>Sandra B. Weiss</i>		Date	11/9/00	

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision.

Complete if Known

TOTAL AMOUNT OF PAYMENT (\$ 984.00

Application Number
Filing Date
First Named Inventor Wei, Guang-Xue et al.
Examiner Name
Group Art Unit
Attorney Docket No. 096990-026-157

METHOD OF PAYMENT

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
- Deposit Account Number 10-1202
- Deposit Account Name Jones, Day, Reavis & Pogue
- ☒ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status. See 37 CFR 1.27
2. ☒ Payment Enclosed: (two checks)
- ☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION

1. BASIC FILING FEE

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
101 710	201 355	Utility filing fee	710.00
106 320	206 160	Design filing fee	
107 490	207 245	Plant filing fee	
108 710	208 355	Reissue filing fee	
114 150	214 75	Provisional filing fee	

SUBTOTAL (1) (\$ 710.00

2. EXTRA CLAIM FEES

Total Claims 33 -20** = 13 X 18.00 = 234

Independent Claims 3 -3** = 0 X 80.00 = 0

Multiple Dependent

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description
103 18	203 9	Claims in excess of 20
102 80	202 40	Independent claims in excess of 3
104 270	204 135	Multiple dependent claim, if not paid
109 80	209 40	** Reissue independent claims over original patent
110 18	210 9	** Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$ 234.00

**or number previously paid, if greater; For Reissues, see above

FEE CALCULATION (continued)

3. ADDITIONAL FEES

Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid
105 130	205 65	Surcharge - late filing fee or oath	
127 50	227 25	Surcharge - late provisional filing fee or cover sheet	
139 130	139 130	Non-English specification	
147 2,520	147 2,520	For filing a request for <i>ex parte</i> reexamination	
112 920*	112 920*	Requesting publication of SIR prior to Examiner action	
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action	
115 110	215 55	Extension for reply within first month	
116 390	216 195	Extension for reply within second month	
117 890	217 445	Extension for reply within third month	
118 1,390	218 695	Extension for reply within fourth month	
128 1,890	228 945	Extension for reply within fifth month	
119 310	219 155	Notice of Appeal	
120 310	220 155	Filing a brief in support of an appeal	
121 270	221 135	Request for oral hearing	
138 1,510	138 1,510	Petition to institute a public use proceeding	
140 110	240 55	Petition to revive - unavoidable	
141 1,240	241 620	Petition to revive - unintentional	
142 1,240	242 620	Utility issue fee (or reissue)	
143 440	243 220	Design issue fee	
144 600	244 300	Plant issue fee	
122 130	122 130	Petitions to the Commissioner	
123 130	123 130	Petitions related to provisional applications	
126 180	126 180	Submission of Information Disclosure Stmt	
581 40	581 40	Recording each patent assignment per property (times number of properties)	40.00
146 710	246 355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149 710	249 355	For each additional invention to be examined (37 CFR § 1.129(b))	
179 710	279 355	Request for Continued Examination (RCE)	
169 900	169 900	Request for expedited examination of a design application	

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$ 40.00

SUBMITTED BY

Name (Print/Type) Sandra B. Weiss Registration No. 30,814 Telephone 312/782-3939

Signature Date 11/9/00

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

FLUORESCENT POLYMERIC ARTICLES
FABRICATED FROM U.V. LIGHT ABSORBING POLYMER

FIELD OF THE INVENTION

The present invention relates generally to fluorescent polymeric articles comprising one or more fluorescent dyes sensitive to ultraviolet light. More particularly, the invention is directed to U.V. light resistant fluorescent polymeric articles fabricated from a fluorescent colorant and a polymeric resin comprising a U.V. light absorbing polymer, or a polymer capable of rearrangement to a U.V. light absorbing polymer upon exposure to light. The articles of the present invention, preferably polymeric sheeting materials comprising a plurality of retroreflective elements, are stabilized against ultraviolet light degradation without need for placement of a separate U.V. screening layer over the article.

BACKGROUND OF THE INVENTION

Retroreflective sheeting is widely used for traffic and roadway safety signs. Such sheeting is typically provided as a polymeric monolayer or multilayer sheeting material having thousands of retroreflective elements, such as microprismatic corner cubes or glass microspheres that reflect incident light. It is well known to incorporate one or more fluorescent dyes into a retroreflective sheeting material in order to enhance the visibility of articles such as road signs manufactured from such sheeting material. Fluorescent colors enhance visual contrast, which

1
makes fluorescent colored materials more conspicuous than nonfluorescent materials.

Unfortunately, most fluorescent colorants have poor ultraviolet light stability. In some cases, fading of fluorescent sheeting due to ultraviolet light exposure can occur within six months. The loss of fluorescence caused by ultraviolet light exposure dramatically shortens the useful life of fluorescent traffic and roadway signs. Accordingly, there is a need in the art to stabilize fluorescent colorants in plastics and to find a means to reduce the fading of fluorescent dyes in order to provide retroreflective road signs that can remain in service for significantly longer periods.

2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
221

U.V. light screening layer may leach out with time, because most U.V. light absorbing compounds are relatively small molecules and the U.V. light screening layer is typically quite thin. As a result of this phenomenon, the screening layer may lose its protective function, and the fluorescent colorants in the fluorescent layer will quickly fade and lose their fluorescence when exposed to ultraviolet light. A further problem with the U.V. light absorbent additive-treated screening layers is that U.V. light absorbing compounds present therein can diffuse or migrate into the fluorescent layer. If the U.V. light absorbing compound is not carefully selected, this diffusion can actually accelerate the fading of the fluorescent colorant even though the diffused compound is one that absorbs U.V. light. The problem of additive migration requires that a U.V. light absorbing additive incorporated into a screening layer be carefully matched to the fluorescent colorant so as to minimize any tendency of the migrating U.V. absorber to affect the color and fluorescence of the article. The implication that one may randomly select any U.V. absorber capable of blocking most U.V. light below 400 nm wavelength (see, e.g., Japan Kokai No. 2-16042, Application No. 63-165914 (Koshiji et al.) and U.S. Patent No. 5,387,458 (Pavelka et al.)) fails to take into account the potential interaction between the U.V. absorber in the screening layer, and the fluorescent dye(s) present in the colored layer.

The use of a multi-layer polymeric structure also presents difficulties in manufacturing. Multiple films must be extruded, cast, or purchased, and the individual films must be laminated together, resulting in a more expensive and more time-consuming process. Moreover, technical problems can arise. For example, the different resins in a multi-layer

structure must be capable of being bonded to one another. Where the multi-layer article is a retroreflective sheeting structure and the refractive indices of contacting layers are different, the interface between the layers must be delicately controlled and remain optically smooth in order to maximize the retroreflectivity of the resultant articles.

5 Based on the problems described above, there is a strong need in the art for fluorescent polymeric articles which exhibit improved fluorescence durability against ultraviolet radiation without the need for placement of a separate U.V. light screening layer over the article.

10 In view of the foregoing, a general object of the present invention is to provide a polymeric article having durable fluorescence in the absence of a separate U.V. light screening layer. Another object of the invention is to provide retroreflective sheeting material having durable fluorescence and being suitable for use in the fabrication of outdoor-weatherable products such as road signs, where the sheeting material is less susceptible to degradation from U.V. light and the rapid loss of fluorescence resulting therefrom.

15 Yet another object of the invention is to provide a fluorescent polymeric article in which a U.V. light-absorbing polymer, or polymer capable of re-arrangement to a U.V. light absorbing polymer, can provide improved fluorescence stability in comparison to non-U.V. light absorbent polymers treated with U.V. light absorbing additives and/or light stabilizers.

These and other objects will become apparent hereinafter to those skilled in the art.


SUMMARY OF THE INVENTION

The present invention results from our discovery that a polymeric article
5 fabricated from a U.V. light absorbing polymer, and/or a polymer capable of undergoing re-
arrangement to a U.V. light absorbing polymer, a fluorescent dye, and optional additives such as
U.V. absorbing compounds and hindered amine light stabilizers can provide a surprising degree
of durability to the resulting fluorescent color. The level of durability is superior to that afforded
when a fluorescent polymeric article is fabricated from a non-U.V. light absorbent polymer
10 treated with conventional U.V. light absorbing additives (e.g., benzophenones and/or
benzotriazoles, either with or without hindered amine light stabilizers, and the like). Although
U.V. light absorbing resins have been known (e.g., polyarylates), it could not have been
predicted that the use of such resins as a host matrix for a fluorescent dye would afford such a
surprising degree of fluorescent durability without the use of an additional U.V. light screening
15 layer.

Accordingly, we have found that the objects stated above can be achieved in a
U.V. light-resistant polymeric article comprising a fluorescent dye and at least one U.V. light
absorbing polymer, or a polymer that can undergo photo-Fries re-arrangement to a U.V. light
absorbing polymer. More particularly the polymeric resin used to fabricate the fluorescent

article comprises at least one polymer, or a mixture thereof, selected from the group consisting of:


- (i) polymers having a polymeric backbone comprising the following repeating moiety A;

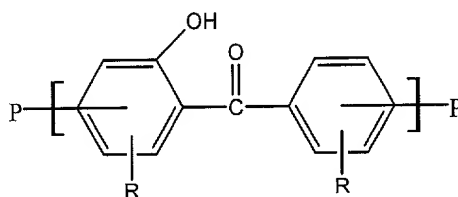

A

wherein R is a non-interfering substituent and P is the remainder of the polymer, and whereby the polymers are able to absorb ultraviolet light; and

- (ii) polymers having a polymeric backbone comprising the following repeating moiety B:

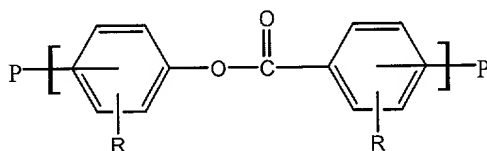

B

where R is a noninterfering substituent and P is the remainder of the polymer; said moiety B being transformable to said moiety A by photo-Fries rearrangement, whereby said polymers

comprising moiety B can undergo rearrangement to ultraviolet-absorbing polymers comprising moiety A;

whereby said fluorescent colorant is stabilized against ultraviolet radiation
5 without placement of a separate U.V. light screening layer over said article.

The term “non-interfering substituent” is intended to denote substituents which do not prevent the above-defined moieties from exhibiting U.V. light absorbent properties, or from undergoing photo-Fries rearrangement to U.V. light absorbing moieties.

The U.V. resistant article of the present invention may also comprise a mixture of
10 the moiety A and moiety B polymers. Without intending to be bound to any particular theory, the enhanced color and fluorescence durability provided in the articles of the present invention are believed to result, at least in part, from the repeating U.V. light absorbing moieties being present directly in the backbone of the host matrix polymer, as distinguished from separate U.V. light absorbing compounds admixed with polymer.

15 The invention is further directed to a retroreflective sheeting material comprising a fluorescent dye in a polymeric resin matrix comprising polyarylate, and a plurality of retroreflective elements; said fluorescent dye being stabilized at least in part by said polyarylate resin matrix against ultraviolet deterioration in the absence of a separate U.V. light screening layer disposed over the sheeting material.

In a further aspect, the invention is directed to a fluorescence-stabilized polymeric retroreflective road sign comprising: a polymeric sheeting material, said sheeting material comprising a fluorescent dye, a polyarylate resin, and a plurality of retroreflective elements, and without a separate U.V. screening layer over the sheeting material.

5 Preferred polymers for the sheeting material of the present invention include polyarylate, and blends of polyarylate with any one or more of the following: polycarbonate, poly(ethylene terephthalate) ("PET"), poly(cyclohexanedimethanol terephthalate) ("PCT") and/or poly(cyclohexanedimethanol-co-ethylene terephthalate ("PETG")). Although the polyarylate backbone contains a moiety B capable of undergoing photo-Fries rearrangement to a
10 benzophenone-type U.V. light absorbing moiety, the invention is also directed to polymers which have benzophenone-type moieties (see moiety A above) in their polymeric backbone and thus do not require rearrangement to become U.V. light absorbent. Surprisingly, we have found that fluorescent polymeric sheeting materials fabricated from blends of polyarylate with either poly(ethylene terephthalate) or polycarbonate afford greater fluorescence stabilization than such
15 fluorescent polymeric sheeting materials fabricated entirely from polyarylate. We have also discovered that the fluorescent stabilization exhibited by the sheeting materials of the present invention may be enhanced by the addition of U.V. light absorbing additives such as benzophenones and/or benzotriazoles, either with or without hindered amine light stabilizers (HALS), and preferably a combination of a U.V. light absorbing (e.g., a benzotriazole
20 compound) and HALS.

Numerous advantages are provided by the invention. For example, the U.V. resistant sheeting material of the present invention will provide excellent fluorescence protection to virtually any fluorescent colorant. Another advantage is that problems associated with leaching out or migration of U.V. light absorbing additives are eliminated. The manufacturing difficulties associated with applying a separate U.V. light absorbing screening layer are also eliminated. Yet another advantage of the invention is that in a preferred embodiment in which polyarylate (and preferably a blend thereof with polycarbonate or poly(ethylene terephthalate)) is present as the U.V. light absorbent polymer in the U.V. resistant sheeting material hereof, the sheeting material is afforded a combination of excellent properties important in the fabrication of durable retroreflective sheeting material such as toughness, impact resistance, and chemical resistance.

DESCRIPTION OF THE FIGURES

FIG. 1 illustrates a cross-section view of a microprismatic retroreflective sheeting material of the invention comprising a monolayer of a U.V. light absorbing polymer matrix having a fluorescent colorant blended therein, and wherein the retroreflective microprismatic cube corner elements are formed onto a surface of the fluorescent U.V. light absorbing layer.

FIG. 2 illustrates a cross-section view of a microprismatic retroreflective sheeting material of the invention comprising a layer of a U.V. light absorbent polymer matrix having a fluorescent colorant blended therein, a colorless retroreflective layer, and an optional tie layer or

adhesive therebetween, and wherein the retroreflective microprismatic cube corner elements are formed onto the colorless layer.

FIG. 3 illustrates a cross-section view of a microprismatic retroreflective sheeting material of the invention comprising a cap or over-laminate layer having desired properties, a layer of a U.V. absorbent polymer matrix having a fluorescent colorant blended therein, a colorless retroreflective layer having microprismatic cube corner elements formed thereon, and an optional tie layer or adhesive between the fluorescent and retroreflective layers.

FIG. 4 illustrates a cross-section view of an enclosed lens retroreflective sheeting material of the invention in which the U.V. light absorbing polymeric matrix having a fluorescent colorant blended therein is disposed over an enclosed lens structure.


FIG. 5 illustrates a cross-section view of an encapsulated lens retroreflective sheeting material of the invention in which the U.V. light absorbing polymeric matrix having a fluorescent colorant blended therein is disposed over an encapsulated lens structure.

DETAILED DESCRIPTION

For purposes of this patent, U.V. light absorbing polymer materials are defined as polymer materials that absorb some quantity of light for at least some wavelengths between about 290-410 nm.


The heart of the invention lies in the use of a U.V. light absorbing polymer, preferably polyarylate, as a component of the polymeric matrix for a sheeting material containing a fluorescent colorant. When exposed to light, polyarylate converts to a polymer having in its backbone hydroxybenzophenone-like moieties which absorb U.V. light. We find that the use of a U.V. light absorbing polymer, such as polyarylate, having U.V. absorbing moieties incorporated in the polymeric backbone, or moieties capable of undergoing photo-Fries rearrangement in situ to U.V. light absorbent moieties, provides much better and longer U.V. protection than that afforded by merely adding conventional U.V. additives such as hydroxybenzophenones to a non-U.V. absorbent polymer. This is quite surprising insofar as the U.V. light absorbing moieties that form segments of the backbone of the polymers used in the invention (hydroxybenzophenone-type moieties, see moiety A, above) are similar to those present in conventional benzophenone U.V. light absorbing additives of the prior art.

In somewhat greater detail, the polymer suitable for fabricating the U.V. light resistant fluorescent sheeting material can comprise any polymer in which the polymeric backbone either comprises the repeating ultraviolet light absorbing o-hydroxybenzophenone moiety A, below:

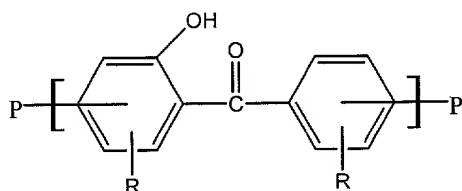

A

or a repeating moiety capable of undergoing re-arrangement to the above moiety. An example of such a repeating moiety is moiety B below:

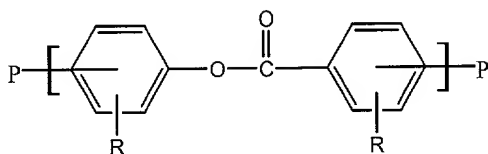

5 An example of a particularly preferred class of polymers for use in the articles of the present invention containing repeating B moieties (and/or repeating A moieties following photo-Fries rearrangement) are the so-called polyarylates.

Generally speaking, polyarylates are very well known in the art and are obtained by polymerization of a diphenol and a dicarboxylic acid. Polyarylates suitable for use in the articles of the instant invention include those described in U.S. 4,598,130, incorporated herein by reference. As described in U.S. 4,598,130, and for purposes of illustration and not by way of limitation, suitable dihydric phenols that can be employed to prepare the polyarylates are bisphenols such as bis(4-hydroxyphenyl) methane, 2,2-bis(4-hydroxyphenyl)propane (bisphenol-A), 2,2-bis(4-hydroxy-3-methylphenyl) propane, 4,4-bis(4-hydroxyphenyl) heptane, 2,2-bis(4-hydroxy-3,5-dichlorophenyl) propane, 2,2-bis(4-hydroxy-3,5-dibromophenyl) propane, etc.; dihydric phenol ethers such as bis(4-hydroxyphenyl) ether, bis(3,5-dichloro-4-hydroxyphenyl) ether, etc.; dihydroxydiphenyls such as p,p'-dihydroxydiphenyl, 3,3'-dichloro-4,4'-

10


15

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995


dihydroxydiphenyl, etc.; dihydroxyaryl sulfones such as bis(4-hydroxyphenyl) sulfone, bis(3,5-dimethyl-4-hydroxyphenyl)sulfone, etc.; dihydroxy benzenes, resorcinol, hydroquinone, halo- and alkyl-substituted dihydroxy benzenes such as 1,4-dihydroxy-2,5-dichlorobenzene, 1,4-dihydroxy-3-methylbenzene, etc.; and dihydroxy diphenyl sulfoxides such as bis(4-hydroxyphenyl) sulfoxide, bis(3,5-dibromo-4-hydroxyphenyl) sulfoxide, etc. A variety of additional dihydric phenols are also available such as are disclosed in U.S. Pat. Nos. 2,999,835; 3,028,365 and 3,153,008. Also suitable are copolymers prepared from the above dihydric phenols copolymerized with halogen-containing dihydric phenols such as 2,2-bis(3,5-dichloro-4-hydroxyphenyl) propane, 2,2-bis(3,5-dibromo-4-hydroxyphenyl) propane, etc. It is also possible to employ two or more different dihydric phenols or a copolymer of a dihydric phenol with a glycol or with hydroxy or acid terminated polyester, or with a dibasic acid as well as blends of any of the above materials. Suitable dicarboxylic acids are the aromatic and aliphatic aromatic dicarboxylic acids such as phthalic, isophthalic, terephthalic, o-phthalic, o-, m-, and p-phenylenediacetic acid; the polynuclear aromatic acids such as diphenic acid, and 1,4-naphthalic acid.

One of the most widely used commercial polyarylates results from the polymerization of bisphenol A (2,2-bis-(4-hydroxyphenyl)propane) and a 50:50 mixture iso/terephthalic acids. This polyarylate, which is particularly preferred for use in the sheeting material of the present invention, was previously commercially available under the tradename "Ardel D100" from Amoco Performance Polymers, Inc. and is now sold by Unitika America Corporation and its distributors under the tradename "U-Polymer U-100". The preferred

polyarylate used in the present invention has the following formulas I and II below. Formula I is the polyarylate prior to photo-Fries rearrangement. Formula II is the polyarylate following photo-Fries rearrangement. One or both polymers may be present in the sheeting material:



I



II

Another suitable group of polyarylates are those based on tetramethyl bisphenol-A, 4,4'-dihydroxybenzophenone, and 5-tertiary-butyl isophthalic acid dichloride, as generally disclosed in Wright, *et al.*, Journal of Membrane Science, vol. 124, pp. 161-174 (1997), and other polyarylate structures disclosed therein.

A discussion of the structure and preparation of polyarylates may be found in the chapter entitled "History of Polyarylates" by L. Robeson and J. Tibbet (at page 95 of the treatise High Performance Polymers: Their Origin and Development, E. B. Seymour and G. S.


Kirshenbaum, editors (1986)). Known processes for the production of a polyarylate include, for example, interfacial polymerization by mixing a solution of an aromatic dicarboxylic acid dihalide in an organic solvent with an alkaline aqueous solution of a bisphenol under stirring to react these materials; solution polymerization by reacting an aromatic dicarboxylic acid dihalide with a bisphenol in the presence of a deacidifying agent such as pyridine in an organic solvent;

molten polymerization by reacting an aromatic dicarboxylic acid diphenyl ester with a bisphenol;
molten polymerization by reacting an aromatic dicarboxylic acid, diphenyl carbonate and a
bisphenol; molten polymerization by reacting an aromatic dicarboxylic acid with a bisphenol
diacetate; and polymerization by reacting an aromatic dicarboxylic acid with a bisphenol
5 diacetate. Methods for preparation of polyarylates may be referenced in further detail in Hirose,
et al. U.S. 5,034,502 and Berger et al. U.S. 4,374,239, both incorporated herein by reference.


It is well known that, upon exposure to ultraviolet light, polyarylates undergo the
photo-Fries rearrangement. See, Korshak et al., in "Synthesis and Properties of Self-Protecting
Polyarylates," Journal of Polymer Science, Part A-1, Vol. 7, pages 157 to 172 (1969), which
10 describes a mechanism to explain what happens when polyarylates are exposed to U.V. light.
The authors propose that polyarylates undergo the photo-Fries rearrangement resulting in
carbonyl and hydroxyl groups ortho to one another, structurally similar to o-
hydroxybenzophenones which are known light absorbers. The o-hydroxybenzophenones which
are part of the polyarylate polymer backbone can absorb greater than 95% U.V. light at
15 wavelengths below 375 nm, and substantial amounts of U.V. light between 375 and 410 nm
wavelength light. We have now found that when these moieties are within the polymeric
backbone of the fluorescent layer, they provide greater durability for those fluorescent colorants
than when the benzophenones are present merely as additives to the polymeric resin matrix.

It should be understood that while the above described polyarylate is a preferred
20 U.V. light absorbing polymer for use in articles of the present invention, any polymer which

contains moiety A or B, above, is contemplated for use in the invention provided the polymer has properties which make it suitable for use in the particular product application under consideration. A further example of such a polymer is the block copolyestercarbonates described in International Patent Application WO 00/26275 (published May 11, 2000), incorporated by reference herein. The copolyestercarbonates described in the '275 application comprise organic carbonate blocks alternating with arylate blocks, where the arylate blocks are derived from a 1,3-dihydroxybenzene moiety and an aromatic dicarboxylic acid. Specifically the block copolyestercarbonate polymer having a moiety A and/or a moiety B as defined above has one or both of the structures (III) and (IV) below, respectively:

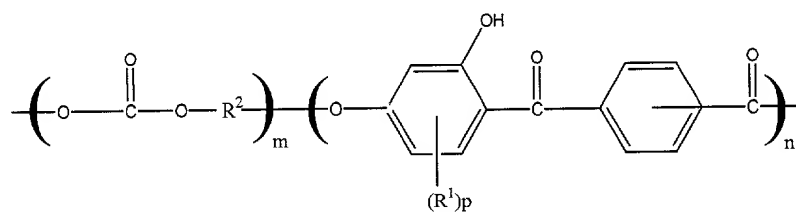

(III)

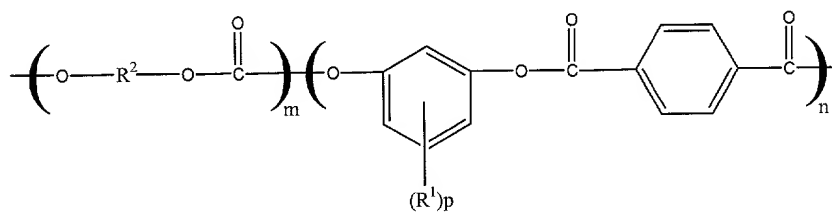

(IV)

wherein each R^1 is independently H or C_1 - C_{12} alkyl, p is 0-3, each R^2 is independently a divalent organic radical; m is at least 1, and preferably about 2-200; and n is at least about 4, and preferably about 30-150.

The applicant in the above mentioned '275 application posits that the weatherability of the above copolyestercarbonates is attributable, at least in part, to the occurrence of thermally or photochemically induced photo-Fries rearrangement of arylate blocks (see structure IV above) to yield o-hydroxybenzophenone moieties (see structure III above) or
5 analogs thereof which serve as absorbers of U.V. radiation.

Additional polymers capable of undergoing rearrangement to U.V. light absorbent polymers are described in Cohen et al in "Transparent Ultraviolet-Barrier Coatings," Journal of Polymer Science, Part A-1, Vol. 9, pages 3263 to 3299 (1971) (incorporated by reference) which describes a number of phenyl polyesters, including polyarylates, which were synthesized to
10 furnish molecules whose backbones rearrange under U.V. light to an o-hydroxybenzophenone structure.

The U.V. absorbing properties of the U.V. absorbing polymer need not result from a photo-Fries rearrangement. For example, as explained in the above-mentioned '275 application, synthesis and polymerization of suitable hydroxybenzophenone type monomers can
15 result in polymers in which the U.V. light absorbing moiety A (see above) is already present in the polymer without need for the polymer to undergo photo-Fries rearrangement.

It should be understood that in the case where a polyarylate is used in the present invention, the U.V. light absorbing properties of the polyarylate will take some time to "develop" in the presence of U.V. radiation, with the time for "development" depending upon the

environment and the intensity of the U.V. radiation. For example, in a Xenon Arc Weather-O-Meter, polyarylate typically takes about 50 hours to "develop." In view of this "development" period, it may be desired, although not required, to include a small quantity of U.V. light absorbing compounds or light stabilizers in or in front of the fluorescent layer to provide some initial protection in the period before the U.V. light absorbing polymer has acquired its full protective capability.

While the polymeric resin used to fabricate a U.V. light resistant fluorescent article may consist entirely of the U.V. absorbing polymers described above containing a moiety A and/or B, it is also contemplated herein to use blends of the U.V. absorbing polymer with other suitable polymers that may or may not have a U.V. absorbing moiety in the polymeric backbone. For example, blends of polyarylate with polymers selected from the group consisting of poly(ethylene terephthalate) ("PET"); poly (cyclohexanedimethanol-co-ethylene terephthalate) ("PETG"); polycarbonate; and poly (cyclohexanedimethanol terephthalate) ("PCT") can be used. Reference may be had to Robeson et al. U.S. Patent Nos. 4,286,075 and 4,259,458 (incorporated herein by reference) for a more detailed discussion of some of the foregoing polyarylate blends. Particularly preferred are blends of polyarylate and either polycarbonate or poly(ethylene terephthalate).

Methods for fabricating thermoplastic sheets from polyarylate and polyarylate blends, and for laminating these sheets to other polymeric layers are well known in the art. See

for example Robeson et al. U.S. 4,643,937. The polymeric films which are used within this process may be fabricated in a known manner, for example using an extrusion methodology.

Preferably, the U.V. resistant sheeting material of the present invention is provided with a plurality of microprism retroreflective elements which may be formed directly onto a surface of the sheeting material in a known manner. For example, Pricone et al. U.S. Patent No. 4,601,861 discloses an improved method and apparatus for continuously embossing a repeating pattern of precise detail, in particular, cube-corner type retroreflector elements, on one surface of a single sheet or on one surface of a laminate of transparent thermoplastic materials, to form retroreflective sheeting. Pricone et al. discloses a continuous embossing tool in the form of a flexible thin metal belt or cylinder having on its outer surface an embossing pattern which is the reverse of the precision optical pattern to be formed. The embossing tool is continuously moved at a predetermined speed along a closed course through a heating station where the temperature of a portion of the embossing tool is raised above the glass transition temperature of the sheeting or laminate, and a cooling station where the heated portion of the embossing tool is cooled, while in a relatively planar condition, to below that glass transition temperature. The sheeting is continuously moved at the predetermined speed from a supply thereof into engagement with the embossing pattern on the tool and is pressed thereagainst continuously at a plurality of pressure points sequentially spaced along the heating station, with the one surface of the sheeting confronting and engaging the embossing pattern until the sheeting is raised above its glass transition temperature and conforms to the embossing pattern on the one face. The sheeting is maintained in engagement with the tool until the tool passes through the cooling

station and the sheeting is lowered below its glass transition temperature and the pattern solidifies. The sheeting thereafter is stripped from the tool. Further details of the foregoing methodology are described in Pricone et al. which is incorporated herein by reference.

It is well known that many colorants, particularly fluorescent colorants, are highly susceptible to U.V. degradation. The fluorescent article of the present invention, insofar as it provides a remarkably stable environment against U.V. weathering, contemplates incorporation of one or more U.V. sensitive fluorescent colorants/dyes or combination thereof, including known such dyes and dye combinations. The invention is not limited to any particular dye or colorant. Examples of suitable dyes are any of the fluorescent dyes which are known in the art for enhanced daytime and nighttime visibility of road signs. Examples of such dyes are the perylene, perylene imide, perylene ester, thioxanthene, thioxanthone, and thioindigoid compounds. Other dyes that may be suitable include the benzoxanthene, benzothiazine, naphthalimide, and coumarin compounds. Blends of the foregoing dyes are also contemplated. As will be apparent to those skilled in the art, when the instant invention is embodied in the form of retroreflective sheeting, the dyes used will be sufficiently transparent such that the retroreflective function of the sheeting will not be significantly impaired.

Further examples of specific fluorescent dyes suitable for incorporation into fluorescent articles of the invention include the perylene ester and perylene imide dyes such as Lumogen F Orange 240, Lumogen F Yellow 083, and Lumogen F Red 300 (all available from BASF, Rensselaer, New York); thioxanthene dyes, such as Hostasol Yellow 3G Solvent Yellow

98 (available from Clariant Corporation, Charlotte, North Carolina) and Marigold Orange D-315 (Day-Glo Color Corporation, Cleveland, Ohio); thioxanthone dyes such as Hostasol Red GG (Clariant); thioindigoid dyes such as Hostasol Red 5B (Clariant); coumarin based dyes such as Macrolex 10 GN (Bayer Corporation) and Potomac Yellow D-838 (Day-Glo); benzoxanthene dyes such as Lumofast Yellow 3G (Day-Glo); and benzothiazine dyes such as Huron Yellow D-417 (Day-Glo).

In addition to the fluorescent dyes, non-fluorescent colorants may also be used to adjust the color of the final product.

The amount of fluorescent dye used in the fluorescent article of the invention is dependent upon the type of dye, typically in the range of about 0.05 to about 1.5 percent, preferably in the range of 0.08 to 1.0 percent based on the total weight of the resin formulation used to fabricate a fluorescent article such as fluorescent sheeting material. In some cases, the loading of fluorescent dyes depends on the gauge of the fluorescent layer of the sheeting material and can be determined in accordance with the skill in the art.

To further enhance the fluorescent durability of articles of the invention, the fluorescent layer of the invention may optionally contain any of the well known ultraviolet absorbers (UVA's) and hindered amine light stabilizers (HALS); such UVA's and HALS also could be included in an optional cap layer or over-laminate layer. The present invention,

however, makes it possible to substantially reduce or eliminate such additives, in either the fluorescent layer or in a cap layer or over-laminate.

Examples of U.V. light absorbers suitable for use in articles of the instant invention include the benzophenones, benzotriazoles, and oxalanilides. Examples of commercially available benzophenones include 2-hydroxy-4-n-octoxybenzophenone commercially available from Great Lakes Chemical Corporation under the trade name "Lowilite 22," 2,2-dihydroxy-4,4-dimethoxybenzophenone available under the trade name "Uvinul 3049" from BASF; and 2,2',2,4'-tetrahydroxybenzophenone available under the trade name "Uvinul 3050" from BASF. Examples of suitable benzotriazoles include 2-(2H-benzotriazol-2-yl)-4,6-bis(1-methyl-1-phenylethyl) phenol, sold under the trade name "Tinuvin 234" by Ciba-Geigy; and 2-(4,6-diphenyl-1,3,5-triazine-2-yl)-5(hexyl)oxyphenol sold commercially by Ciba-Geigy as "Tinuvin 1577". An example of an oxalanilide U.V. absorber is 2-ethyl,2'-ethoxy-oxalanilide sold under the trade name "Sanduvor VSU" by Clariant. Individuals skilled in the art will recognize that many other suitable benzophenone, benzotriazole, and oxalanilide U.V. light absorbers exist and may be suitable for use in the present invention.

The amount of U.V. light absorber suitable for use in the fluorescent layer of the invention is in the range of about 0.2 to about 4 percent, and preferably in the range of about 0.3 to about 2.0 percent based on the total weight of the fluorescent layer.

We believe it may be advantageous to use oligomeric and/or polymeric HALS in the present invention either alone or in conjunction with U.V. light absorbers. Examples of suitable HALS include: dimethyl succinate polymer with 4-hydroxy-2,2,6,6-tetramethyl-1-piperidineethanol commercially available from Ciba Specialty Additives as "Tinuvin 622";
5 poly[[6-[(1,1,3,3,-tetramethyl butyl) amino]-s-triazine-2,4-diyl][[(2,2,6,6,-tetramethyl-4-piperidyl) imino] hexamethylene [(2,2,6,6-tetramethyl-4-piperidyl) imino]] commercially available from Ciba Specialty Additives under the trade name Chimassorb 944; "Tinuvin 791" which is available from Ciba Specialty Additives and is a blend of poly[[6-[(1,1,3,3,-tetramethyl butyl) amino]-s-triazine-2,4-diyl][[(2,2,6,6,-tetramethyl-4-piperidyl) imino] hexamethylene
10 [(2,2,6,6-tetramethyl-4-piperidyl) imino]] and bis(2,2,6,6-tetramethyl-4-piperidynyl) sebacate; and "Hostavin N30" available from Clariant. Those skilled in the art will recognize that many other hindered amine light stabilizers may be used in the present invention.

The amount of HALS suitable for use in the fluorescent layer of the invention is in the range of about 0.2 to about 2 percent, and preferably in the range of about 0.3 to about 1.0
15 percent based on the total weight of the fluorescent layer formulation.

FIGS. 1-5 illustrate different embodiments of fluorescent retroreflective sheeting material in accordance with the instant invention in which a polymer matrix comprises a U.V. light absorbing polymer and a fluorescent colorant blended therein, and in which the retroreflective elements are either microprismatic cube corner elements (FIGS. 1-3) or glass
20 microspheres (FIGS. 4-5).

FIG. 1 illustrates the simplest embodiment of a retroreflective sheeting article made in accordance with the instant invention, which is a monolayer structure having a layer 10 which is a polymer matrix comprising a U.V. light absorbing polymer and a fluorescent colorant blended therein, and having microprismatic retroreflective elements disposed on the rear surface of the layer.

FIG. 2 illustrates an alternative embodiment of a retroreflective sheeting article made in accordance with the instant invention having a layer 20 which is a polymer matrix comprising a U.V. light absorbing polymer and a fluorescent colorant blended therein disposed in laminar configuration over retroreflective layer 22. Such a construction may be desirable when one polymeric material may be preferred for use in the retroreflective layer, such as for its optical properties or its cube geometry retention properties, which may differ from those properties of layer 20. The structure of FIG. 2 allows the sheeting designer to choose materials for each of the layers that will optimize the properties of the entire finished sheeting structure for a particular intended purpose. Optional layer 23 can be either a tie layer or a laminating adhesive disposed between layers 20 and 22.

FIG. 3 illustrates an alternative embodiment of a retroreflective sheeting article made in accordance with the instant invention comprising a layer 30 which is a polymer matrix comprising a U.V. light absorbent polymer and a fluorescent colorant blended therein, disposed in laminar configuration over layer 32 having retroreflective elements disposed on the opposite surface thereof, and a cap layer or over-laminate film 34 disposed in laminar configuration over

layer 30. Cap layer or over laminate film 34 may be selected to have properties desirable for the front surface of a sign, such as dew-resistance or ease of printing, which properties may not be optimum in the polymer matrix of layer 30. Optional layer 33 can be either a tie layer or a laminating adhesive disposed between layers 30 and 32.

5 The embodiments of FIGS. 1-3 are by way of illustration and not by way of limitation. For example, the optional tie layer or laminating adhesive 33 of FIG. 3 also could be used between layers 30 and 34. The cap layer or over-laminate layer of FIG. 3 could find utility in the structure of FIG. 1. Other variations will be apparent to those skilled in the art of retroreflective sheeting.

10 In another embodiment of the invention, one surface of one of the layers of the multi-layer embodiments can be pre-printed with a desired legend, so that the finished laminar structure has the desired legend on an inner surface thereof, such as disclosed in U.S. 5,213,872 and U.S. 5,310,436, both incorporated herein by reference in their entirety. For example, a layer having a legend pre-printed thereon may be disposed between layers 20 and 22 of FIG. 2, or a
15 legend may be pre-printed on the top or bottom surface of layer 30 or the bottom surface of layer 34 of the embodiment of FIG. 3.

FIG. 4 illustrates how the present invention can be incorporated into an enclosed lens retroreflective sheeting article. Enclosed lens retroreflective sheeting is well-known in the art, having been taught as early as U.S. 2,407,680 (Palmquist) and comprising lenses such as

glass microspheres embedded in a sheeting structure with a flat, transparent cover film. In the embodiment in FIG. 4, glass microspheres 41 are embedded in flat transparent cover film 40 comprising a U.V. light absorbing polymer and a fluorescent dye blended therein. Specularly reflective layer 45 may be vacuum deposited aluminum, as is well known in the art.

5 FIG. 5 illustrates how the present invention can be incorporated into an encapsulated lens retroreflective article. Encapsulated lens sheeting is also well known in the art, having been taught as early as U.S. 3,190,178 (McKenzie). Such sheeting comprises a binder layer in which a monolayer of lenses such as glass microspheres is partially embedded, and further comprises a cover film sealed to the binder layer such that the lenses are encapsulated within hermetically sealed cells. In the embodiment illustrated in FIG. 5, glass microspheres 51
10 are partially embedded in binder layer 52, and cover film 50 comprises a U.V. light absorbing polymer and a fluorescent dye blended therein.

Multi-layer embodiments of the glass bead sheeting of FIGS. 4, 5, such as are shown for microprismatic sheeting in FIGS. 1-3, will be apparent to those skilled in the art.

15 The U.V. light resistant article of the present invention is suitable for numerous applications in which the article will be exposed to outdoor weathering conditions.

The following examples are provided for purposes of illustration, only, and are not intended to limit the invention as defined in the appended claims.

EXAMPLES

In each of the following examples, the fluorescent film formulations of the instant invention were of polyarylate (PAL), blends of polyarylate with polycarbonate (PAL/PC), and blends of polyarylate with poly(ethylene terephthalate) (PAL/PET). It will be understood, however, that the fluorescent formulations can be any transparent film containing polyarylate or a polymer with similar molecular structure to polyarylate, and blends thereof, which contain the U.V. light absorbing moieties A and/or B defined above. The polyarylate resin pellets used were "U-Polymer U-100", the PAL/PC blend pellets used were "U-Polymer P-5001", and the PAL/PET blend pellets used were "U-Polymer U-8400H", all available from Unitika, Japan. In comparative sample 1-1, the polycarbonate resin pellets used were Calibre-302 available from Dow Chemical Company. The fluorescent dye used in each sample was Hostasol Yellow 3G available from Clariant, present as 0.25 wt% in each sample. The film formulations were made using a C. W. Brabender Plasti-Corder Prep-Mixer (manufactured by C.W. Brabender Instruments, Inc. of Hackensack, NJ) through melt mixing of polymer resins and additives, followed by conversion into films of about 6 mils using a heated platen press. The mixing temperatures used were in the range of about 230-300 °C depending on the resins. The Brabender speed was 100 rpm and the mixing time used was in the range of about 3 to 6 minutes. Samples were prepared in 150 gram batches. Any exceptions to this sample preparation method will be noted in the specific examples.

Each sample was placed into a Xenon Arc accelerated "Weather-O-Meter" weathering unit. The test methodology used for the Xenon Arc weathering is outlined in ASTM

G26-90, Section 1.3.1. Borosilicate inner and outer filters were used, and the irradiance level was set to 0.35 W/m² at 340 nm. Color measurements were taken routinely on a HunterLab LS-6000 colorimeter using a D65 light source, 2° observer, and a 0/45 geometric configuration. To determine the extent of fading and color shifts, the CIELAB ΔE^* color difference was calculated to compare the initial color reading taken prior to accelerated weathering and the color reading after weathering for preselected durations of time. A small value for the CIE ΔE^* color difference factor indicates small difference in color. A value of about 2 or 3 is barely detectable to the human eye.

Example 1

This example demonstrates the effectiveness of polyarylate and polyarylate blends as U.V. absorbing polymer matrices for a fluorescent dye relative to polycarbonate, without any U.V. absorbing additives or hindered amine light stabilizers.

Table I

Accelerated Weathering Results of Fluorescence in Different

Polymer Without UVA's or HALS

Sample	Matrix	ΔE^* of Samples Exposed at Noted Period of Time (Hours)		
		500	1000	1500
1-1 (comparison)	Polycarbonate	8.24	26.07	44.26
1-2	Polyarylate	6.19	9.98	13.96
1-3	PAL/PC	4.14	4.31	5.78
1-4	PAL/PET	2.98	4.46	7.49

These results illustrate the effectiveness of polyarylate and polyarylate blends at protecting fluorescent color from U.V. light degradation as compared to polycarbonate. It is particularly surprising that the blends of PAL/PC and PAL/PET have superior fluorescent and color durability compared to pure polyarylate. Sample 1-1 was prepared through extrusion technique on a Killion 1/4" single-screw laboratory extruder.

Example 2

Example 2 demonstrates the improved fluorescent durability achieved by addition of a U.V. light absorber to polymeric films containing polyarylate ("PAL") blended with polycarbonate (PC) or polyethylene terephthalate (PET). Samples of PAL/PC and PAL/PET containing fluorescent dye were prepared as described in Example 1, except that the samples also included as a U.V. light absorber a benzotriazole-based compound sold by Ciba under the name Tinuvin 1577. Samples 2-1, 2-2 were loaded at 0.3 wt% and sample 2-3 was loaded at 3.0 wt%.

The samples were weathered using the Xenon Arc accelerated Weather-O-Meter for the period noted. The results are shown in Table II.

Table II
Accelerated Weathering Results of Fluorescence in PAL Blends with UVA

Sample	Matrix	ΔE^* of Samples Exposed at Noted Period of Time (Hours)		
		500	1000	1500
2-1	PAL/PC/0.3% UV abs	1.65	2.18	2.94
2-2	PAL/PET/0.3% UV abs	3.49	7.86	3.66
2-3	PAL/PET/3.0% UV abs	3.87	4.85	4.31

The results in Table II show that the U.V. absorber is effective in providing fluorescent durability in PAL/PC and PAL/PET blends. It is noteworthy that a 10-fold increase in U.V. absorber loading between sample 2-2 and 2-3 did not result in a significant change in ΔE^* at 1500 hours of accelerated exposure.

Example 3

This example illustrates the effectiveness of combining a U.V. light absorber and HALS to provide durable fluorescence in PAL/PC and PAL/PET blends. The loading of U.V. light absorber (Tinuvin 1577) and HALS (Tinuvin 791) was 0.3 wt%, each. The results are shown in Table III.

Table III

Accelerated Weathering Results of Fluorescence in PAL Blends

with UVA and HALS Additives

Sample	Matrix	ΔE^* of Samples Exposed at Noted Period of Time (Hours)		
		500	1000	1500
3-1	PAL/PC/UV/HALS	2.38	2.44	3.75
3-2	PAL/PET/UV/HALS	2.71	2.60	1.58

5

The results demonstrate that the combination of UVA and HALS in PAL/PC and PAL/PET blends is remarkably effective in preventing the degradation of a fluorescent dye.

Example 4

This example illustrates that different HALS compounds in combination with a benzotriazole U.V. light absorbing additive provide increase fluorescent durability of fluorescent dyes in PAL/PET blends in accordance with the instant invention. Three HALS, namely, Tinuvin 791, Tinuvin 622, and Hostavin N30 (available from Clariant), each were blended in a PAL/PET matrix with the benzotriazole Tinuvin 1577 and Hostasol Yellow 3G dye. Each HALS and the UVA Tinuvin 1577 were loaded at 0.3 wt%. The accelerated weathering results are shown in

15 Table IV. (Note that sample 4-2 below is also sample 3-2 in Example 3 above.)

Table IV

Accelerated Weathering Results of Fluorescence in PAL/PET Blends

with UVA and Different HALS Compounds

Sample	Matrix	Type of HALS	ΔE^* of Samples Exposed at Noted Period of Time (Hours)		
			500	1000	1500
4-1	PAL/PET	T-622	2.0	4.53	5.43
4-2	PAL/PET	T-791	2.71	2.60	1.58
4-3	PAL/PET	N30	3.97	5.05	3.53

The results in Table IV illustrate that different HALS combined with UVA Tinuvin 1577 are effective in increasing the durability of Hostasol Yellow 3G fluorescent dye in PAL/PET blends in accordance with the instant invention.


While the article of the instant invention has been described in terms of a fluorescent retroreflective sheeting material, the invention is not so limited. The instant invention is intended to encompass any fluorescent article that can benefit from an ultraviolet absorbing polymer matrix of the claimed composition. Other fluorescent articles intended for long term outdoor use and provided with such a U.V.-absorbing polymer matrix are also intended to be within the scope of the invention. The invention also is not limited to the particular materials disclosed herein. Those skilled in the art will recognize that there are many polyarylate materials other than the specific materials disclosed herein that may be suitable for use in the instant invention. Some such materials may have backbone moiety structures which differ slightly from the backbone moiety structures disclosed herein. For purposes of the instant

invention, what is important is that the polymer material comprise a polymer which either is, or is capable of undergoing rearrangement into, a U.V. light absorbing polymer material. Further, while the polymeric resins discussed herein have been thermoplastic resins, certain thermoset resins may also find utility in structures embodying the U.V. light absorbing polymer matrix of the instant invention. Similarly, other fluorescent dyes, U.V. light absorbers, and HALS compounds can also be used.

We Claim:

1. An article comprising a fluorescent dye in a polymeric resin matrix, the polymeric resin matrix comprising at least one polymeric resin, or mixture thereof, selected from the group consisting of:


- (i) polymers having a polymeric backbone comprising the following repeating moiety A;

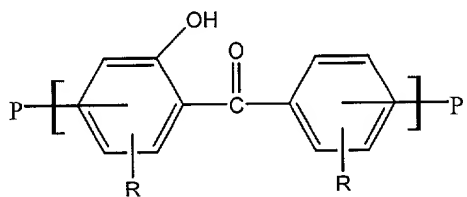

A

wherein R is a non-interfering substituent and P is the remainder of the polymer;
and whereby the polymers are able to absorb ultraviolet light; and

- (ii) having a polymeric backbone comprising the following repeating moiety B:

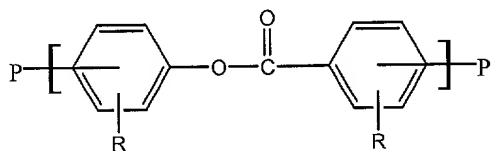


B


where R is a noninterfering substituent and P is the remainder of the polymer; said moiety B being transformable to said moiety A by photo-Fries rearrangement, whereby said polymer comprising moiety B can be transformed to an ultraviolet light absorbing polymer comprising moiety A.

2. The article of claim 1 wherein the polymeric resin comprises a polyarylate.

3. The article of claim 2 wherein the polyarylate comprises one or both of the following repeating structures I and II:



I



II

4. The article of claim 1 wherein the polymeric resin comprises a blend of polyarylate and at least one additional polymer.



5. The article of claim 4 wherein said additional polymer is selected from the group consisting of polycarbonate, poly(ethylene terephthalate), poly(cyclohexanedimethanol terephthalate), and poly(cyclohexanedimethanol-co-ethylene terephthalate).

6. The article of claim 4 wherein the additional polymer comprises poly(ethylene terephthalate).

7. The article of claim 4 wherein said additional polymer comprises polycarbonate.

8. The article of claim 1 wherein said at least one polymer resin comprises a block copolyestercarbonate having arylate blocks and carbonate blocks.

9. The article of claim 8 wherein the block copolyestercarbonate comprises one or both of the following repeating units:

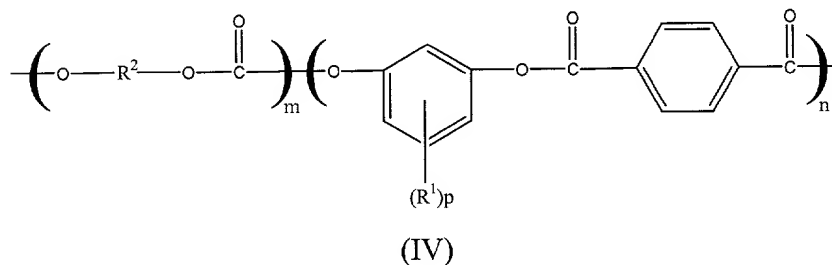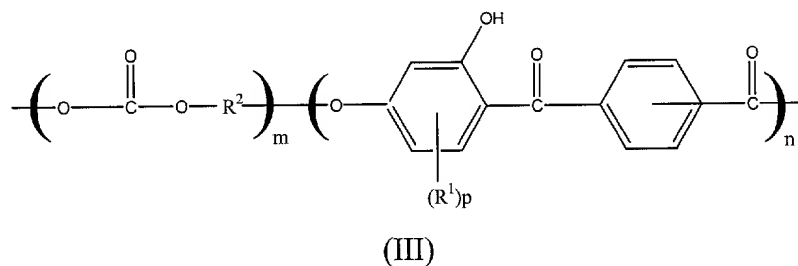

wherein each R^1 is independently H or C_1 - C_{12} alkyl, p is 0-3, each R^2 is independently a divalent organic radical; m is about 2-200; and n is about 30-150.

10. The article of claim 1 in the form of a retroreflective sheeting material.
11. The article of claim 1 wherein the fluorescent dye comprises a dye selected from the group consisting of perylene dyes, perylene ester dyes, perylene imide dyes, thioxanthone dyes, thioindigoid dyes, thioxanthene dyes, benzoxanthene dyes, benzothiazine dyes, naphthalimide dyes, coumarin dyes, and mixtures thereof.
12. The article of claim 11 wherein the fluorescent dye comprises a thioxanthene dye.
13. The article of claim 12 wherein the thioxanthene dye comprises Solvent Yellow 98.
14. The article of claim 11 wherein the fluorescent dye comprises a perylene, perylene imide, or perylene ester dye.
15. The article of claim 14 wherein the fluorescent dye comprises any one or more of Lumogen F Yellow 083, Lumogen F Yellow 240, and Lumogen F Red 300.
16. The article of claim 11 wherein the fluorescent dye comprises a benzoxanthene dye.

17. The article of claim 11 wherein the fluorescent dye comprises a benzothiazine dye.


18. The article of claim 1 wherein said polymeric resin matrix further comprises one or more additives selected from the group consisting of U.V. light absorbing additives and hindered amine light stabilizing additives, said one or more additives being present as an admixture in said polymeric resin matrix.

19. The article of claim 1 further comprising a plurality of retroreflective elements selected from the group consisting of microprismatic cube corners and glass microspheres.


20. The article of claim 19 wherein said retroreflective elements are microprismatic cube corners.

21. A fluorescent retroreflective sheeting material comprising: a fluorescent layer comprising a polymeric resin matrix comprising a polyarylate and a fluorescent dye admixed therein; and a plurality of retroreflective elements.

22. The sheeting material of claim 21 wherein the polyarylate comprises one or both of the following repeating units (I) and (II):



I



II

23. The sheeting material of claim 21 wherein said polymeric resin comprises a blend of polycarbonate and polyarylate.

24. The sheeting material of claim 21 wherein said polymeric resin comprises a blend of poly(ethylene terephthalate) and polyarylate.

25. The sheeting material of claim 21 wherein the fluorescent dye is selected from the group consisting of perylene dyes, perylene ester dyes, perylene imide dyes, thioxanthone dyes, thioindigoid dyes, thioxanthene dyes, benzoxanthene dyes, benzothiazine dyes, naphthalimide dyes, coumarin dyes, and mixtures thereof.

26. The sheeting material of claim 21 wherein said retroreflective elements are microprismatic cube corners on a surface of said fluorescent layer.

27. The sheeting material of claim 21 further comprising a second layer of a light transmissive polymeric material, with the fluorescent layer being disposed in laminar

configuration over one surface of said second layer and said retroreflective elements being microprismatic cube corners on the opposite surface of said second layer.

28. The sheeting material of claim 21 wherein said retroreflective elements comprise glass microspheres in an enclosed lens configuration.

29. The sheeting material of claim 21 wherein said retroreflective elements comprise glass microspheres in an encapsulated lens configuration.

30. The sheeting material of claim 21 further comprising a capping film or overlamine film disposed in laminar configuration over said fluorescent layer.

31. The article of claim 1 wherein said polymeric resin absorbs substantial amounts of light in a substantial portion of the light spectrum between about 290-410 nm.

32. An article comprising a fluorescent dye in a polymeric resin matrix, the polymeric resin matrix comprising at least one polymer, or a mixture thereof, which either is, or is capable of undergoing rearrangement into, a U.V. light absorbing polymer material.

33. The article of claim 33 wherein said at least one polymer is a polyarylate.

ABSTRACT

A fluorescent article is disclosed comprising a polymer matrix comprising a polymer having in its backbone repeating units of a U.V. light absorbing moiety, or a moiety capable of being transformed by photo-Fries rearrangement into a U.V. light absorbing moiety, the matrix further comprising a fluorescent dye. The matrix affords surprisingly improved fluorescence protection as compared to prior fluorescent articles having only U.V. light absorbing additives.

5

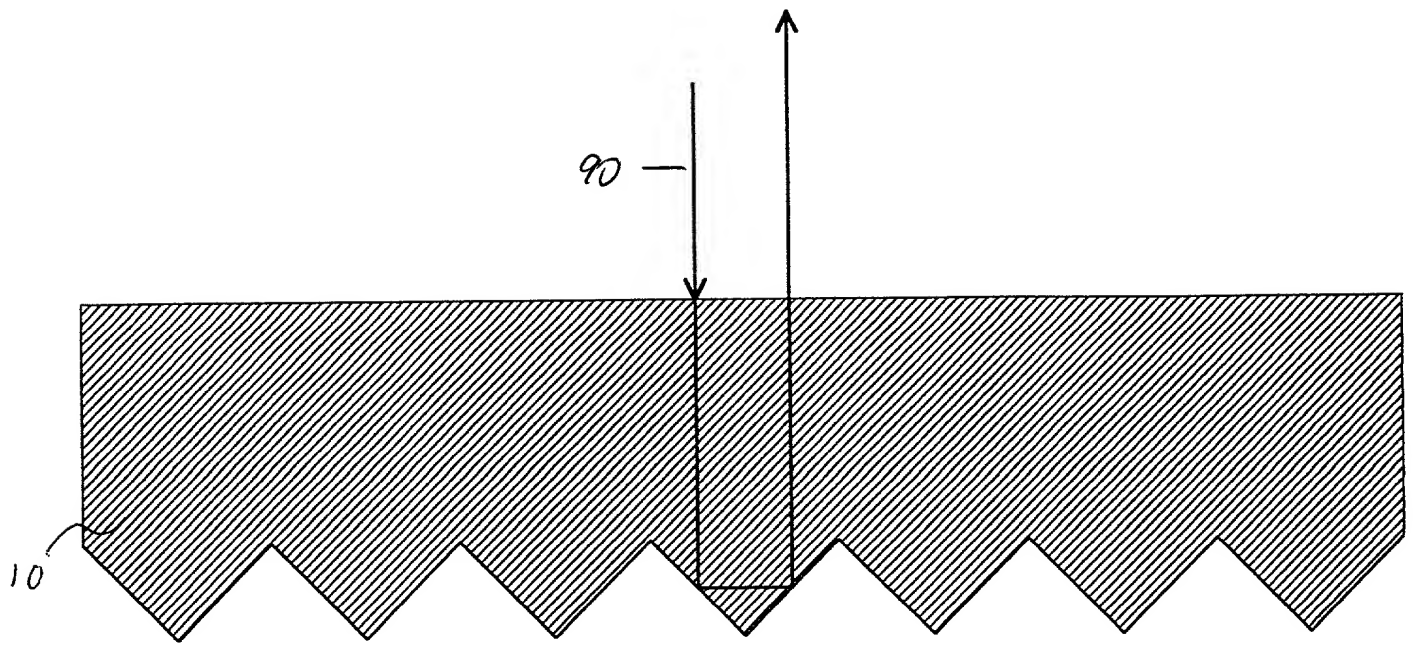


FIGURE 1




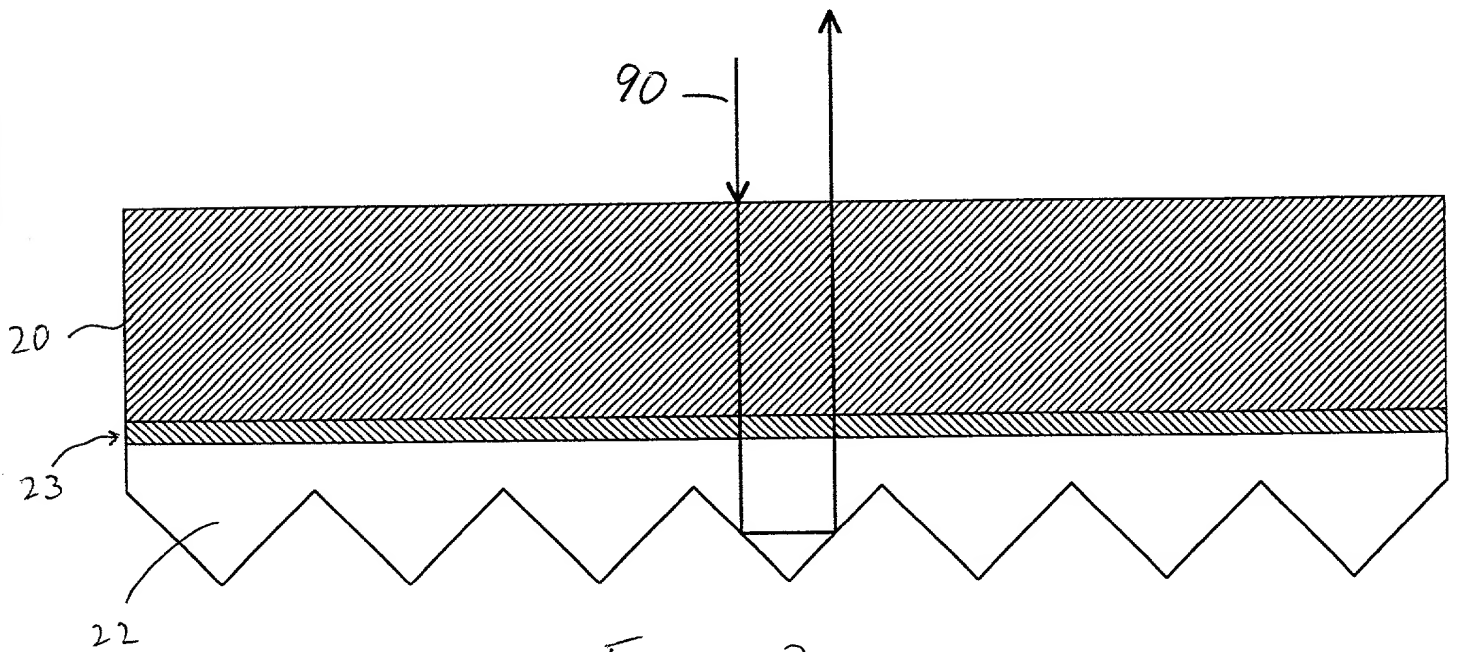


FIGURE 2

09/10/2010 10:40:00

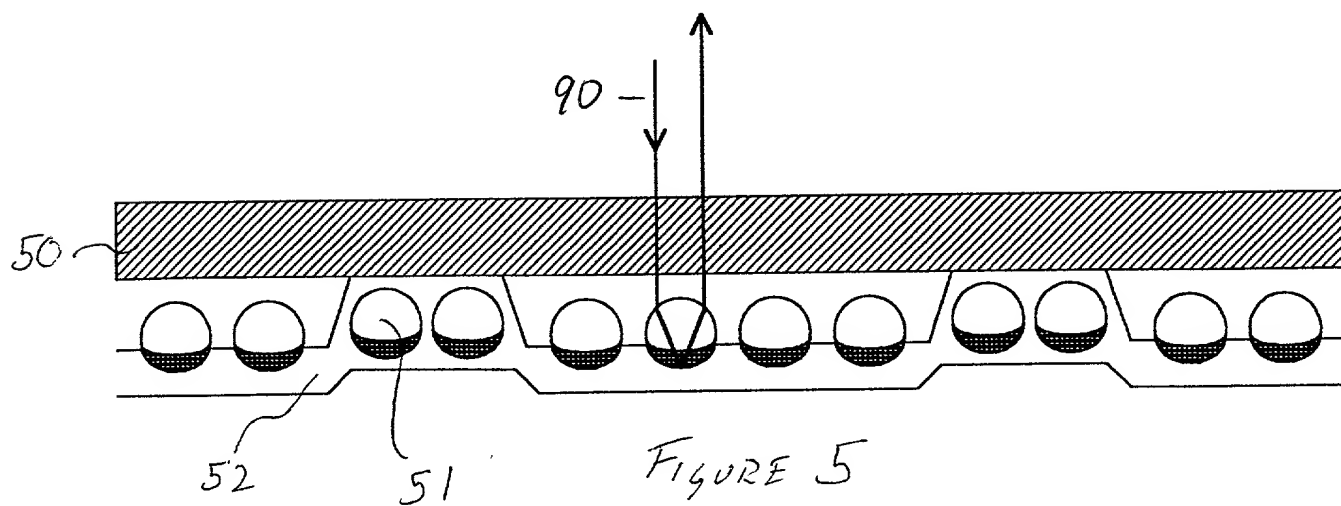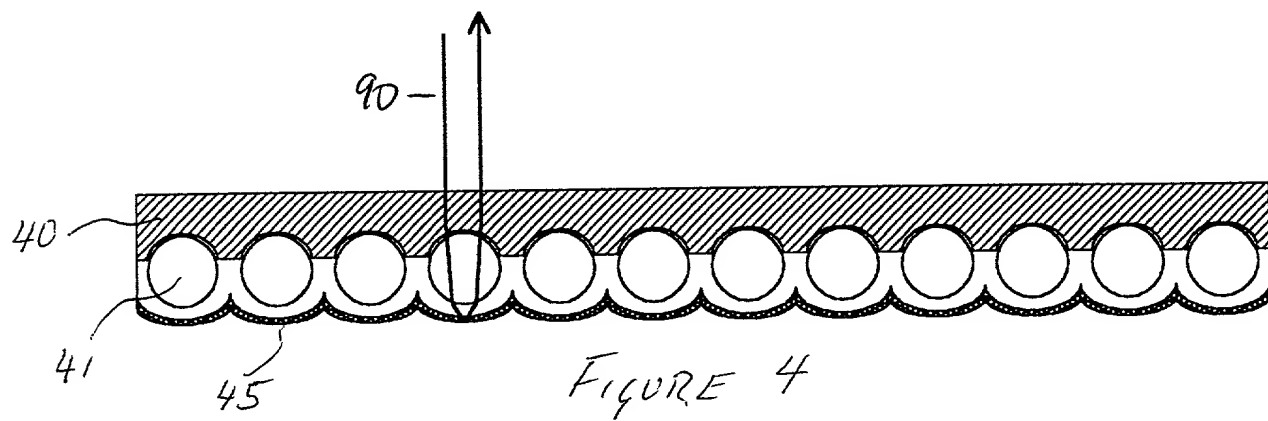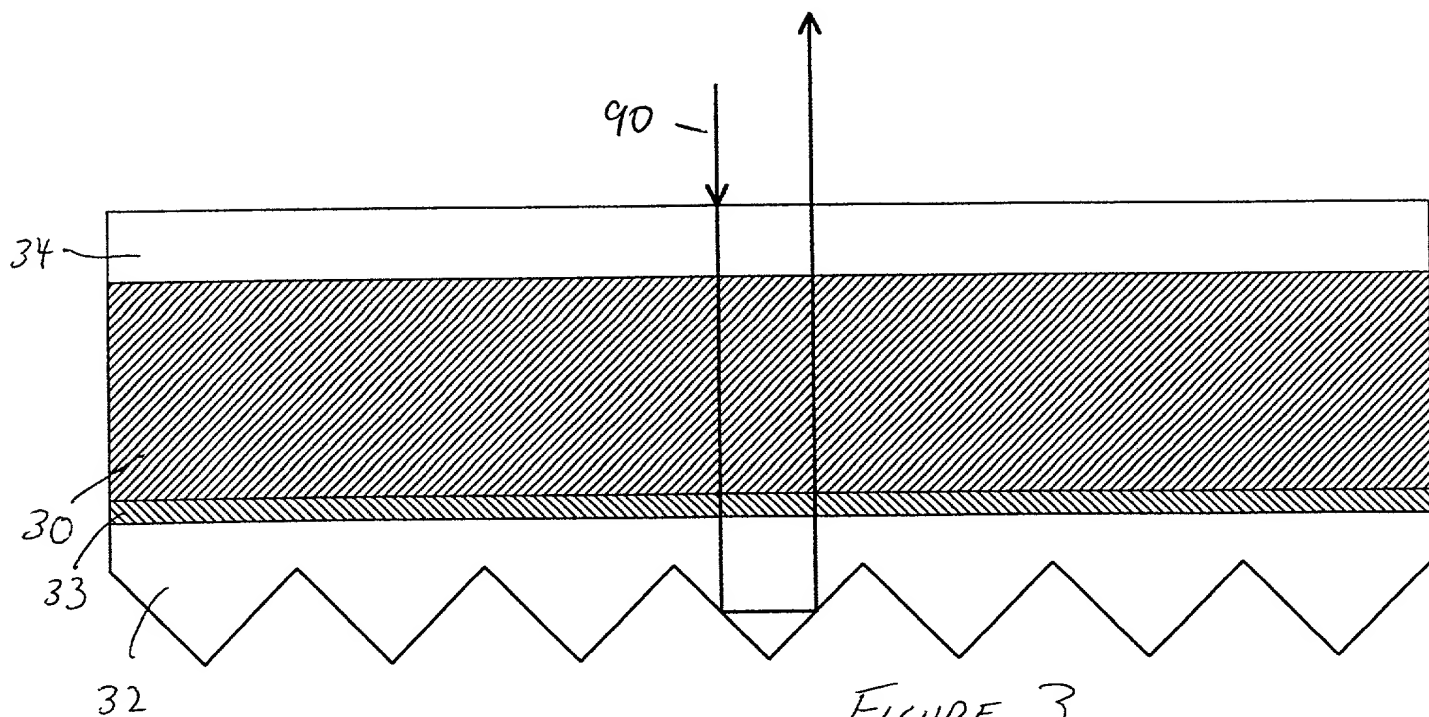

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**FLUORESCENT POLYMERIC ARTICLES FABRICATED
FROM U.V. ABSORBENT POLYMER**

the specification of which:

(check one) x is attached hereto

 was sent for filing on and
accorded Application Serial No. and was
amended on ,
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendments referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed: **NONE**

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application: **NONE**

As a named inventor, I hereby appoint: RONALD A. SANDLER, Reg. No. 23,066; SANDRA B. WEISS, Reg. No. 30,814; RUSSELL L. McILWAIN, Reg. No. 28,641; JAMES B. RADEN, Reg. No. 24,594; DAVID L. WITCOFF, Reg. No. 31,443; JOHN A. MARLOTT, Reg. No. 37,031, JOSEPH H. GOLANT, Reg. No. 24,210; MARC S. BLACKMAN, Reg. No. 43,501; STACY A. BERMAN, Reg. No. 44,534; MARK V. CAMPAGNA, Reg. No. 42,380; and KRISTA S. SCHWARTZ, Reg. No. 42,134 who are with the firm of JONES, DAY, REAVIS & POGUE, as my attorneys or patent agents, with full

006990-026-157

power of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected herewith.

I request that all correspondence be directed to:

Sandra B. Weiss
JONES, DAY, REAVIS & POGUE
77 West Wacker Drive
Chicago, Illinois 60601-1692

Please direct all telephone calls to Sandra B. Weiss at (312) 782-3939.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: WEI, Guang-Xue

Inventor's signature: Guang-Xue Wei

Date: Nov. 9th, 2000

Residence: 3634 Salem Walk, Apartment B2
Northbrook, Illinois 60062

Citizenship: Peoples Republic of China

Post Office Address: same as residence

Full name of second inventor: BUONI, Drew J.

Inventor's signature: Drew J. Buoni

Date: Nov. 9th, 2000

Residence: 2147 West Crystal Street
Chicago, Illinois 60622

Citizenship: U.S.A.

Post Office Address: same as residence

